

e-Series UR3e

e-Series FROM UNIVERSAL ROBOTS WORLD'S #1 COLLABORATIVE ROBOT

Presenting the e-Series

The e-Series UR3e is the small but powerful version of the ground-breaking collaborative robot technology from Universal Robots, market leader in cobots. The UR3e lets your business seamlessly integrate a cutting-edge robot into your existing production environment to fully explore and benefit from the opportunities that automation offers. Boost productivity, improve quality and increase job satisfaction – the possibilities are endless.

Next-generation automation

Small but powerful, the UR3e has a payload of 3 kg and reach radius of 500 mm. With 360-degree rotation on all wrist joints and infinite rotation on the end joint, this table-top cobot handles high precision tasks and light assembly tasks with ease. This versatility is supported by the Universal Robots+ ecosystem, an online showroom that provides cutting-edge products to customize a UR robot application that perfectly meets your requirements.

Limitless potential anyone can embrace

The UR3e lets anyone program in just minutes. Use the intuitive Teach Pendant to program by simply moving the cobot to the desired waypoints or select from pre-programmed functions on the touchscreen. The built-in Force Torque sensor delivers maximum precision and allows the UR3e to be programmed for highly sensitive applications.

● The Universal Robots advantage

Universal Robots is setting new standards for how businesses use collaborative robot technology with fast set-up times, limitless flexibility, easy programming, safe and collaborative operation, and fast payback.

● Fast set-up

Unpack, mount and program the first simple task with your UR3e in just 60 minutes.

● Easy programming

Intuitive user interface dramatically reduces the time it takes to program. Inexperienced programmers can learn to program the UR3e in as little as 87 minutes, using the free training modules at Universal Robots Academy.

● Limitless flexibility

Quickly and easily automate almost any task with virtually unlimited applications in your production and deploy the UR3e as often as required.

● Collaborative

Our cobots are certified by TÜV NORD for ISO 10218-1 and safety functions are rated as Cat.3 PL d according to ISO 13849-1 and, subject to risk assessment, can typically work safely alongside operators on the production line, all thanks to built-in and customizable safety features. At Universal Robots, we make safety imperative so our users are free to explore and experiment with the unlimited applications of our cobots for greater productivity and product quality with peace of mind.

[Explore more at universal-robots.com/e-series](https://universal-robots.com/e-series)

Universal Robots USA, Inc., 5430 Data Court, Suite 300, Ann Arbor, Michigan 48108 United States
Tel. +1 844-GO-COBOT or +1 844-462-6268, ur.na@universal-robots.com

Universal Robots, Energivej 25, 5260 Odense S, Denmark
+45 8993 8989, sales@universal-robots.com



UNIVERSAL ROBOTS

universal-robots.com

UR3e technical details

Performance

Power consumption	Approx. 100 W using a typical program		
Collaboration operation	17 advanced adjustable safety functions incl. elbow monitoring. Remote Control according to ISO 10218		
Certifications	EN ISO 13849-1, Cat.3, PL d, and EN ISO 10218-1		
F/T Sensor - Force, x-y-z	F/T Sensor - Torque, x-y-z		
Range	30 N	Range	10 Nm
Resolution	1.0 N	Resolution	0.02 Nm
Accuracy	3.5 N	Accuracy	0.10 Nm
Ambient temperature range	0-50°C*		
Humidity	90% RH (non-condensing)		

Specification

Payload	3 kg / 6.6 lbs		
Reach	500 mm / 19.7 in		
Degrees of freedom	6 rotating joints DOF		
Programming	Polyscope graphical user interface on 12 inch touchscreen with mounting		

Movement

Pose Repeatability	+/- 0.03 mm, with payload, per ISO 9283		
Axis movement robot arm	Working range	Maximum speed	
Base	± 360°	±180°/Sec.	
Shoulder	± 360°	±180°/Sec.	
Elbow	± 360°	±180°/Sec.	
Wrist 1	± 360°	±360°/Sec.	
Wrist 2	± 360°	±360°/Sec.	
Wrist 3	Infinite	±360°/Sec.	
Typical TCP speed	1 m/Sec. / 39.4 in/Sec.		


Features

IP classification	IP54		
ISO Class Cleanroom	5		
Noise	Less than 60 dB(A)		
Robot mounting	Any Orientation		
I/O Ports	Digital in	2	
	Digital out	2	
	Analog in	2	
	Analog out	0	
	UART interface (9.6k-5Mbps)		
I/O power supply in tool	12V/24V 600mA continuous, 2A for shorter periods		

Physical

Footprint	Ø 128 mm		
Materials	Aluminium, Plastic, Steel		
Tool (end-effector) connector type	M8 M8 8-pin		
Cable length robot arm	6 m / 236 in		
Weight including cable	11.2 kg / 24.7 lbs		

* The robot can work in a temperature range of 0-50°C at a high continuous joint speed, ambient temperature is reduced

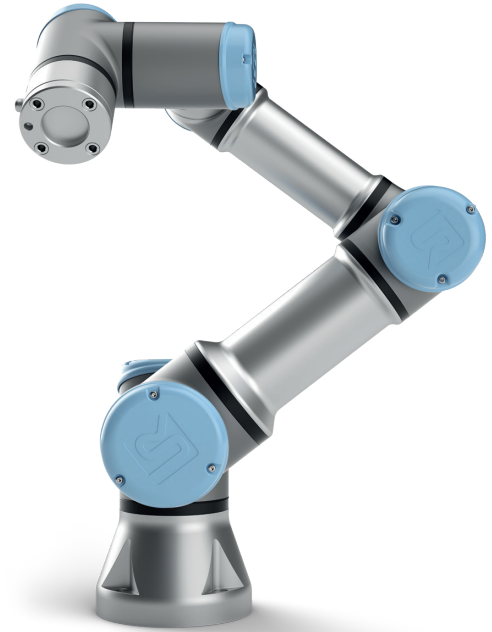

Control box

Features

IP classification	IP44		
ISO Class Cleanroom	6		
Ambient temperature range	0-50°C		
I/O Ports	Digital in	16	
	Digital out	16	
	Analog in	2	
	Analog out	2	
	500 Hz control, 4 separated high speed quadrature digital inputs		
I/O Power supply	24V 2A		
Communication	Control frequency: 500 Hz ModbusTCP: 500 Hz signal frequency ProfiNet and EthernetIP: 500 Hz signal frequency USB ports: 1 USB 2.0, 1 USB 3.0		
Power source	100-240 VAC, 47-440Hz		
Humidity	90% RH (non-condensing)		

Physical

Control box size (WxHxD)	475 mm x 423 mm x 268 mm 18.7 in x 16.7 in x 10.6 in		
Weight	Max 13.6 kg / 30.0 lbs		
Materials	Steel		

Teach pendant

Features

IP classification	IP54		
Humidity	90% RH (non-condensing)		
Display resolution	1280 x 800 pixels		

Physical

Materials	Plastic		
Weight including 1m of TP cable	1.6 kg / 3.5 lbs		
Cable length	4.5 m / 177.17 in		



UNIVERSAL ROBOTS

universal-robots.com